



Fosmon [ETL Listed] 125VAC/15A/60Hz Plug-in Countdown Timer w/ 2
Grounded Outlets - White



PLEASE DO NOT RETURN THIS PRODUCT

There are good days and bad days. If
there is a problem with your product
or you are unhappy with it,

**PLEASE GIVE US A CHANCE TO
MAKE IT RIGHT.**

Email: support@fosmon.com

US Toll Free: 1-833-3-FOSMON

(833-336-7666)

Local / International: 1-612-435-7508

Thank you for purchasing this Fosmon product. For optimum performance and safety, please read this user manual carefully before operating and keep it for future reference.

Fosmon's Indoor plug-in countdown timer will allow you to power devices for a set amount of time before automatically shutting off. The repeat function will allow you to set a schedule to power devices for a pre-determined amount of time every day.


Package Includes

- 1x Plug-in countdown timer
- 1x User Manual

Specifications

Voltage	125VAC 60Hz
Maximum Load	1 5A 1875W Resistive 10A 1250W Tungsten ½ HP TV-5
Backup Battery	2.4V NiMH Battery Life: Approx. 100 hours
For Indoor Use Only	

Product Diagram

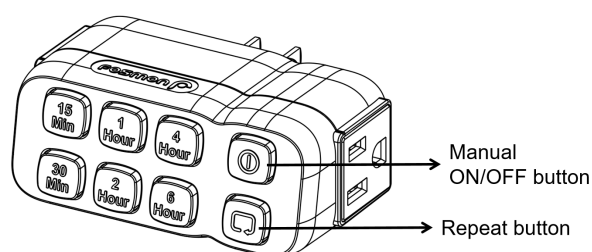

Operations

Countdown function

1. Plug the timer into an outlet.
2. Press 15min, 30min, 1hour, 2hour, 4hour and(or) 6hour button to set countdown program.

For example: set 5 hour 45minute countdown program:

First, press the 15min button followed by the 30min button within 2 seconds. Then, press the 1hour button within 2 seconds. Lastly, press the 4hour button within 2 seconds. 5 hour 45minute countdown program is set successfully when the 4 button's indicators are turned on.

3. Once program is confirmed, the timer is turned on during the countdown period, and then it turns off once the program is completed.
4. During the countdown program, press any time buttons to set a new countdown program.

Daily repeat function

1. Pressing the repeat button when the countdown program is running will turn the repeat indicator on. This will remain on and indicates that the current program will run at the same time every day.

For example: set 2 hour repeat program:

2 hour countdown program is set at 6:00PM. Repeat button is pressed at 7:00PM. 2 hour countdown program will run at 7:00PM every day.

Manual ON/OFF button

Press manual button to override countdown or repeat program. The timer remains ON or OFF.

Back-up battery

1. In case of power failure, the timer will continue to work by using the internal battery. However, it cannot turn the attached device on or off.
2. If the internal battery runs out, the timer is reset.

Warnings

Risk of Electric Shock

- Keep children away.
- Do not use in wet locations.
- Do not plug two or more timers together.
- Always ensure the plug of any appliance is fully inserted into the timer outlet.
- If cleaning of the timer is required, remove from mains power and wipe timer with a dry cloth.
- Do not immerse timer in water or any other liquid.
- For indoor use only.

Risk of Fire

- Don't plug in an appliance where the load exceeds rated capacity.
- Do not use with extension cords.
- Do not use to control appliances that contain heating elements (cooking appliances, heaters, irons, etc.).

FCC Information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Limited Lifetime Warranty

Visit fosmon.com/warranty for Product Registration, warranty and limited liability details.

Recycling the Product

To dispose this product properly, please follow the recycling process regulated in your area.

Follow Us On Social Media